



OFFICE OF THE
DIRECTOR GENERAL OF CIVIL AVIATION
OPP. SAFDARJUNG AIRPORT, NEW DELHI – 110 003

TELEPHONE: 091-011-24635261
24644768
FAX: 091-011-24644764

TELEX: 31-74127
TELEGRAMS: AIRCIVIL

Reference: No.:
Dated:

संख्या : AV.22024/3/2007-FID
दिनांक : 23rd February 2010

OPERATIONS CIRCULAR 7 of 2010

Subject: OPERATIONAL PROCEDURES AND TRAINING REQUIREMENTS OF AIRBORNE COLLISION AVOIDANCE SYSTEM (ACAS) EQUIPMENT

1. INTRODUCTION

- a. Indian the Aircraft Rules, 1937, and other related regulation and ICAO Annex 6 requires that all aircraft of greater than 5700 kg or carrying more than 19 passengers be equipped with airborne collision avoidance system (ACAS II). In addition the ICAO Annexes and related regulations requires policies, instructions, procedures and training for the avoidance of collisions be developed by air operators and included in the Operations Manual.
- b. ACAS indications are intended to assist pilots in the avoidance of potential collisions and the active search for, and visual acquisition of, conflicting traffic. For ACAS to work as designed, immediate and correct crew response to ACAS advisories is essential. Delayed flight crew response to an RA or reluctance to maneuver the aircraft in response to an RA for whatever reason, can significantly decrease or negate the protection afforded by ACAS.
- c. The purpose of this Circular is to highlight the ACAS operational procedures and performance based training requirements. More detailed information is provided in the documents outlined below.

2. RELATED REGULATIONS, STANDARDS, AND GUIDANCE

- a. CAR Section 2 Series I Pt. VII
- b. ICAO Procedures for Air Navigation Services, Volume I, Part III, Section 3, Chapter 3 (DOC8168)
- c. PANS-OPS Doc 8168 Attachment A to pt. VIII
- d. ICAO Airborne Collision Avoidance System (ACAS) Manual (DOC9863)
- e. PANS – ATM (DOC 4444)

3. GENERAL

a. For the system to achieve its designed safety benefits, flight crews must operate the system and respond to ACAS alerts in a manner compatible with the system design. Many ACAS alerts will involve more than one ACAS-equipped aircraft. In these coordinated encounters, it is essential that each flight crew respond in a predictable manner. This Circular defines the knowledge of the system and its operation that should be included in pilot training programmes and includes information on system performance, proper use of ACAS controls, and proper responses to ACAS alerts. The guidelines require both classroom training and manoeuvre training conducted in either aircraft simulators or other computer based trainers when Simulator Training is not applicable. Flight crews must be tested to ensure they are wholly familiar with ACAS procedures, capabilities, and limitations and are able to respond correctly to ACAS indications. Moreover, regularly scheduled recurrent training sessions shall include ACAS training.

b. The information provided by an airborne collision avoidance system (ACAS) is intended to assist pilots in the safe operation of aircraft by providing advice on appropriate action to reduce the risk of collision. This is achieved through resolution advisories (RAs), which propose manoeuvres, and through traffic advisories (TAs), which are intended to prompt visual acquisition and to act as a warning that an RA may follow. Traffic advisories (TAs) indicate the approximate positions of intruding aircraft that may later cause resolution advisories. Resolution advisories (RAs) propose vertical manoeuvres that are predicted to increase or maintain separation from threatening aircraft. ACAS I equipment is only capable of providing TAs, while ACAS II is capable of providing both TAs and RAs. In this chapter, reference to ACAS means ACAS II.

c. Airborne collision avoidance system (ACAS) indications shall be used by pilots in the avoidance of potential collisions, the enhancement of situational awareness, and the active search for, and visual acquisition of, conflicting traffic. ACAS procedures outlined in “Use of ACAS indicators”, shall not prevent pilots-in-commands from exercising their best judgement and full authority in the choice of the best course of action to resolve a traffic conflict or avert a potential collision.

4. USE OF ACAS INDICATORS

The indications generated by ACAS shall be used by pilots in conformity with the following safety considerations:

- a. pilots shall not manoeuvre their aircraft in response to traffic advisories (TAs) only;

Note 1.— TAs are intended to alert pilots to the possibility of a resolution advisory (RA), to enhance situational awareness, and to assist in visual acquisition of conflicting traffic. However, visually acquired traffic may not be the same traffic causing a TA. Visual perception of an encounter may be misleading, particularly at night.

Note 2.— The above restriction in the use of TAs is due to the limited bearing accuracy and to the difficulty in interpreting altitude rate from displayed traffic information.

- b. on receipt of a TA, pilots shall use all available information to prepare for appropriate action if an RA occurs; and

- c. in the event of an RA, pilots shall:

- 1) respond immediately by following the RA as indicated, unless doing so would jeopardize the safety of the aeroplane;

Note 1.— Stall warning, wind shear, and ground proximity warning system alerts have precedence over ACAS.

Note 2.— Visually acquired traffic may not be the same traffic causing an RA. Visual perception of an encounter may be misleading, particularly at night.

- 2) follow the RA even if there is a conflict between the RA and an air traffic control (ATC) instruction to manoeuvre;

- 3) not manoeuvre in the opposite sense to an RA;

Note.— In the case of an ACAS-ACAS coordinated encounter, the RAs complement each other in order to reduce the potential for collision. Manoeuvres, or lack of manoeuvres, that result in vertical rates opposite to the sense of an RA could result in a collision with the threat aircraft.

- 4) as soon as possible, as permitted by flight crew workload, notify the appropriate ATC unit of the RA, including the direction of any deviation from the current ATC instruction or clearance;

Note.— Unless informed by the pilot, ATC does not know when ACAS issues RAs. It is possible for ATC to issue instructions that are unknowingly contrary to ACAS RA indications. Therefore, it is important that ATC be notified when

an ATC instruction or clearance is not being followed because it conflicts with an RA.

- 5) promptly comply with any modified RAs;
- 6) limit the alterations of the flight path to the minimum extent necessary to comply with the RAs;
- 7) promptly return to the terms of the ATC instruction or clearance when the conflict is resolved; and
- 8) notify ATC when returning to the current clearance.

Note.— Procedures in regard to ACAS-equipped aircraft and the phraseology to be used for the notification of manoeuvres in response to an RA are contained in the PANS-ATM (Doc 4444), Chapters 15 and 12 respectively.

5. ACAS TRAINING -GENERAL

- a. During the implementation of ACAS and the operational evaluations conducted by some Civil Aviation Authorities, several operational issues were identified that were attributed to deficiencies in pilot training programmes. To address these deficiencies, a set of performance-based training objectives for ACAS pilot training was developed by ICAO. The training objectives cover: theory of operation; pre-flight operations; general in-flight operations; response to traffic advisories (TAs); and response to resolution advisories (RAs). The training objectives are further divided into the areas of: ACAS academic training; ACAS manoeuvre training; ACAS initial evaluation; and ACAS recurrent qualification. Details concerning the Academic training are contained in Attachment 1 to this Advisory Circular.

5.1 ACAS INITIAL EVALUATION

- a). The pilot's understanding of the academic training items should be assessed by means of a written test or interactive CBT that records correct and incorrect responses to questions.
- b). The pilot's understanding of the manoeuvre training items should be assessed in a flight simulator equipped with an ACAS display and controls similar in appearance and operation to those in the aircraft the pilot will fly, and the results assessed by a qualified instructor, inspector, or Examiner. The range of scenarios should include: initial RAs requiring a change in vertical speed; initial RAs that do not require a change in vertical speed; maintain rate RAs; altitude crossing RAs; increase rate RAs; RA reversals; weakening RAs; RAs issued while the aircraft is at the maximum altitude, and multi-aircraft encounters. In all scenarios, excursions should be limited to the extent required by the RA. The scenarios should be concluded with a return to the original flight profile. The scenarios should also include demonstrations of the consequences

of not responding to RAs, slow or late responses, and manoeuvring opposite to the direction called for by the displayed RA.

c). If an operator does not have access to an ACAS-equipped simulator, the initial ACAS evaluation should be conducted by means of an interactive CBT with an ACAS display and controls similar in appearance and operation to those in the aircraft the pilot will fly. This interactive CBT should depict scenarios in which real-time responses must be made, and a record should be made of whether or not each response was correct. The CBT should include all types of RAs described.

5.2 ACAS RECURRENT TRAINING

a). ACAS recurrent training ensures that pilots maintain the appropriate ACAS knowledge and skills. ACAS recurrent training should be integrated into and/or conducted in conjunction with other established recurrent training programmes. An essential item of recurrent training is the discussion of any significant issues and operational concerns that have been identified by the operator.

b). ACAS monitoring programmes periodically publish findings from their analyses of ACAS events. The results of these analyses typically discuss technical and operational issues related to the use and operation of ACAS. This information is available from ICAO or directly from the monitoring programmes. ACAS recurrent training programmes should address the results of monitoring programmes in both the academic and simulator portions of recurrent training visits.

Note: ACAS monitoring programmes are carried out by some States and international organizations including the United States' Federal Aviation Administration (FAA) and the European Organisation for the Safety of Air Navigation (EUROCONTROL).

c). Recurrent training should include both academic and manoeuvre training and address any significant issues identified by line operating experience, system changes, procedural changes, or unique characteristics such as the introduction of new aircraft/ display systems or operations in airspace where high numbers of TAs and RAs have been reported.

d). Pilots should fly all scenarios once every four years.

e). Pilots should complete all scenarios once every two years if CBT is used.

6. HIGH VERTICAL RATE (HVR) ENCOUNTERS

Operators should specify procedures by which an aeroplane climbing or descending to an assigned altitude or flight level, especially with an autopilot engaged, may do so at a rate less than 8 m/sec (1 500 ft/min)* throughout the last 300 m (1 000 ft) of climb or descent to the assigned level. These procedures are intended to avoid unnecessary airborne collision avoidance system (ACAS II) resolution advisories in

aircraft at adjacent levels. Detailed information on HVR encounters and guidance material concerning the development of appropriate procedures is contained in Attachment II to this Part.

** Certain Airspaces/ Terminal areas may require lower rates.*

7. APPLICABILITY

Air operators shall review their ACAS operations procedures and training programmes to ensure that they are current with the requirements of DGCA regulations/ Circulars and relevant ICAO Documents.

Sd/-
Capt. Arvind Kathpalia
Flight Operations Inspector
for Director General of Civil Aviation

ACAS ACADEMIC TRAINING

1.0 Introduction

1.1 ACAS academic training material has been divided into items that are considered essential training and those that are considered desirable. Those items that are deemed to be essential are a requirement for each ACAS operator. In each area, a list of objectives and acceptable performance criteria is defined. All manoeuvre training is considered essential.

1.2 In developing this material, no attempt was made to define how the training programme should be implemented. Instead, objectives were established that define the knowledge a pilot operating ACAS is expected to possess and the performance expected from a pilot who has completed ACAS training. Therefore, all pilots who operate ACAS equipment should receive the ACAS training as described in Attachment I.

2.1 General

This training is typically conducted in a classroom environment. The knowledge demonstrations specified in this section may be achieved through the successful completion of written tests or providing correct responses to non-realtime computer-based training (CBT) questions.

2.2 Essential items

2.2.1 *Theory of operation.* The pilot must demonstrate an understanding of ACAS operation and the criteria used for issuing TAs and RAs. This training should address the following topics:

2.2.1.1 *System operation*

OBJECTIVE: Demonstrate knowledge of how ACAS functions.

CRITERIA: The pilot must demonstrate an understanding of the following functions:

a) Surveillance:

1) ACAS interrogates other transponder-equipped aircraft within a nominal range of 26 km (14 NM); and

2) ACAS surveillance range can be reduced in geographic areas with a large number of ground interrogators and/or ACAS-equipped aircraft. A minimum surveillance range of 8.5 km (4.5 NM) is guaranteed for ACAS aircraft that are airborne.

Note._ If the operator's ACAS installation provides for the use of the Mode S extended squitter, the normal surveillance range may be increased beyond the nominal 14 NM. However, this information is not used for collision avoidance purposes.

b) Collision avoidance:

1) TAs can be issued against any transponder-equipped aircraft that responds to the ICAO Mode C interrogations, even if the aircraft does not have altitude-reporting capability;

Note._ SSR transponders having only Mode A capability do not generate TAs. ACAS does not use Mode A interrogations; therefore, the Mode A transponder codes of nearby aircraft are not known to ACAS. In ICAO SARPs, Mode C minus the altitude is not considered Mode A because of the difference in the pulse intervals. ACAS uses the framing pulses of replies to Mode C interrogations and will track and may display aircraft equipped with an operating Mode A/C transponder whether or not the altitude-reporting function has been enabled.

2) RAs can be issued only against aircraft that are reporting altitude and in the vertical plane only;

3) RAs issued against an ACAS-equipped intruder are coordinated to ensure that complementary RAs are issued;

4) failure to respond to an RA deprives the aircraft of the collision protection provided by its ACAS. Additionally, in ACAS-ACAS encounters, it also restricts the choices available to the other aircraft's ACAS and thus renders the other aircraft's ACAS less effective than if the first aircraft were not ACAS-equipped; and

5) manoeuvring in a direction opposite to that indicated by an RA is likely to result in further reduction in separation. This is particularly true in the case of an ACAS-ACAS coordinated encounter.

2.2.1.2 Advisory thresholds

OBJECTIVE: Demonstrate knowledge of the criteria for issuing TAs and RAs.

CRITERIA: The pilot must be able to demonstrate an understanding of the methodology used by ACAS to issue TAs and RAs and the general criteria for the issuance of these advisories to include:

a) ACAS advisories are based on time to closest point of approach (CPA) rather than distance. The time must be short and vertical separation must be small, or projected to be small, before an advisory can be issued. The separation standards provided by air traffic services are different from those against which ACAS issues alerts;

- b) thresholds for issuing a TA or RA vary with altitude. The thresholds are larger at higher altitudes;
- c) TAs generally occur from 20 to 48 seconds prior to CPA. When ACAS is operated in TA-only mode, RAs will be inhibited;
- d) RAs occur from 15 to 35 seconds before the projected CPA; and
- e) RAs are chosen to provide the desired vertical separation at CPA. As a result, RAs can instruct a climb or descent through the intruder aircraft's altitude.

2.2.1.3 ACAS limitations

OBJECTIVE: To verify that the pilot is aware of the limitations of ACAS.

CRITERIA: The pilot must demonstrate a knowledge and understanding of the ACAS limitations including:

- a) ACAS will neither track nor display non-transponder-equipped aircraft, nor aircraft with an inoperable transponder, nor aircraft with a Mode A transponder;
- b) ACAS will automatically fail if the input from the aircraft's barometric altimeter, radio altimeter, or transponder is lost;

Note._ In some installations, the loss of information from other on-board systems such as an inertial reference system (IRS) or attitude and heading reference system (AHRS) may result in an ACAS failure. Individual operators should ensure that their pilots are aware of what types of aircraft system failures will result in an ACAS failure.

- c) some aircraft within 116 m (380 ft) above ground level (AGL) (nominal value) will not be displayed. If ACAS is able to determine that an aircraft below this altitude is airborne, it will be displayed;
- d) ACAS may not display all proximate transponder-equipped aircraft in areas of high-density traffic; however, it will still issue RAs as necessary;
- e) because of design limitations, the bearing displayed by ACAS is not sufficiently accurate to support the initiation of horizontal manoeuvres based solely on the traffic display;
- f) because of design limitations, ACAS will neither display nor give alerts against intruders with a vertical speed in excess of 3 048 m/min (10 000 ft/min). In addition, the design implementation may result in some short-term errors in the tracked vertical speed of an intruder during periods of high vertical acceleration by the intruder; and
- g) stall warnings, ground proximity warning system (GPWS)/enhanced ground proximity warning system (EGPWS) warnings, and wind shear warnings take precedence over ACAS advisories. When either a GPWS/ EGPWS or wind shear warning is active, ACAS will automatically switch to the TA-only mode of

operation except that ACAS aural annunciations will be inhibited. ACAS will remain in TA-only mode for 10 seconds after the GPWS/ EGPWS or wind shear warning is removed.

2.2.1.4 ACAS *inhibits*

OBJECTIVE: To verify that the pilot is aware of the conditions under which certain functions of ACAS are inhibited.

CRITERIA: The pilot must demonstrate a knowledge and understanding of the various ACAS inhibits including:

- a) increase descent RAs are inhibited below 442 (_30) m (1 450 (_100) ft) AGL;
- b) descend RAs are inhibited below 335 (_30) m (1 100 (_100) ft) AGL;
- c) all RAs are inhibited below 305 (_30) m (1 000 (_100) ft) AGL;
- d) all ACAS aural annunciations are inhibited below 152 (_30) m (500 (_100) ft) AGL. This includes the aural annunciation for TAs; and
- e) altitude and configuration under which climb and increase climb RAs are inhibited. ACAS can still issue climb and increase climb RAs when operating at the aircraft's maximum altitude or certified ceiling. However, if aeroplane performance at maximum altitude is not sufficient to enable compliance with the climb rate required by a climb RA, the response should still be in the required sense but not beyond the extent permitted by aeroplane performance limitations.

Note. In some aircraft types, climb or increase climb RAs are never inhibited.

2.2.2 *Operating procedures.* The pilot must demonstrate the knowledge required to operate ACAS and interpret the information presented by ACAS. This training should address the following topics:

2.2.2.1 *Use of controls*

OBJECTIVE: To verify that the pilot can properly operate all ACAS and display controls.

CRITERIA: Demonstrate the proper use of controls including:

- a) aircraft configuration required to initiate a self-test;
- b) steps required to initiate a self-test;
- c) recognizing when the self-test is successful and when it is unsuccessful. When the self-test is unsuccessful, recognizing the reason for the failure, and, if possible, correcting the problem;

- d) recommended usage of traffic display range selection. Low ranges are used in the terminal area, and the higher display ranges are used in the en-route environment and in the transition between the terminal and en-route environment;
- e) if available, recommended usage of the *_Above/Below_* mode selector. *_Above_* mode should be used during climb, and *_Below_* mode should be used during descent;
- f) recognition that the configuration of the traffic display, i.e. range and *_Above/Below_* selection, does not affect the ACAS surveillance volume;
- g) selection of lower ranges on the traffic display to increase display resolution when an advisory is issued;
- h) if available, proper selection of the display of absolute or relative altitude and the limitations of using the absolute display option if a barometric correction is not provided to ACAS; and
- i) proper configuration to display the appropriate ACAS information without eliminating the display of other needed information.

Note._ The wide variety of display implementations makes it difficult to establish more definitive criteria. When the training programme is developed, these general criteria should be expanded to cover specific details for an operator's specific display implementation.

2.2.2.2 Display interpretation

OBJECTIVE: To verify that a pilot understands the meaning of all information that can be displayed by ACAS.

CRITERIA: The pilot must demonstrate the ability to properly interpret information displayed by ACAS including:

- a) other traffic, i.e. traffic within the selected display range that is not proximate traffic, or causing a TA or RA to be issued;
- b) Proximate traffic, i.e. traffic that is within 11 km (6 NM) and *_366 m (1 200 ft)*;
- c) non-altitude reporting traffic;
- d) no bearing TAs and RAs;
- e) off-scale TAs and RAs. The selected range should be changed to ensure that all available information on the intruder is displayed;
- f) traffic advisories. The minimum available display range that allows the traffic to be displayed should be selected to provide the maximum display resolution;
- g) resolution advisories (traffic display). The minimum available display range of the traffic display that allows the traffic to be displayed should be selected to provide the maximum display resolution;

h) resolution advisories (RA display). Pilots should demonstrate knowledge of the meaning of the red and green areas or the meaning of pitch or flight path angle cues displayed on the RA display. For displays using red and green areas, pilots should demonstrate knowledge of when the green areas will and will not be displayed. Pilots should also demonstrate an understanding of the RA display limitations, i.e. if a vertical speed tape is used and the range of the tape is less than 762 m/min (2 500 ft/min), how an increase rate RA will be displayed; and

i) if appropriate, awareness that navigation displays oriented *_Track-Up_* may require a pilot to make a mental adjustment for drift angle when assessing the bearing of proximate traffic.

Note._ The wide variety of display implementations will require the tailoring of some criteria. When the training programme is developed, these criteria should be expanded to cover details for an operator's specific display implementation.

2.2.2.3 Use of the TA-only mode

OBJECTIVE: To verify that a pilot understands the appropriate times to select the TA-only mode of operation and the limitations associated with using this mode.

CRITERIA: The pilot must demonstrate the following:

a) knowledge of the operator's guidance for the use of TA-only mode;

b) reasons for using this mode and situations in which its use may be desirable. These include operating in known close proximity to other aircraft such as when visual approaches are being used to closely spaced parallel runways or taking off towards aircraft operating in a VFR corridor. If TA-only mode is not selected when an airport is conducting simultaneous operations from parallel runways separated by less than 366 m (1 200 ft), and to some intersecting runways, RAs can be expected. If an RA is received in these situations, the response should comply with the operator's approved procedures; and

c) the TA aural annunciation is inhibited below 152 m (*_30*) m (500 ft (*_100*) ft) AGL. As a result, TAs issued below 152 m (500 ft) AGL may not be noticed unless the TA display is included in the routine instrument scan.

2.2.2.4 Crew coordination

OBJECTIVE: To verify that pilots adequately brief other crew members on how ACAS advisories will be handled.

CRITERIA: Pilots must demonstrate that their pre-flight briefing addresses the procedures that will be used in responding to TAs and RAs including:

a) division of duties between the pilot flying and the pilot not flying, including a clear definition of whether the pilot flying or the pilot-in-command will fly the aircraft during a response to an RA;

- b) expected call-outs;
- c) communications with ATC; and
- d) conditions under which an RA may not be followed and who will make this decision.

Note 1._ Different operators have different procedures for conducting pre-flight briefings and for responding to ACAS advisories. These factors should be taken into consideration when implementing the training programme.

Note 2._ The operator must specify the conditions under which an RA need not be followed, reflecting advice published by States_ Civil Aviation Authorities. This should not be an item left to the discretion of a crew.

Note 3._ This portion of the training may be combined with other training such as crew resource management (CRM).

2.2.2.5 Reporting requirements

OBJECTIVE: To verify that the pilot is aware of the requirements for reporting RAs to the controller and other authorities.

CRITERIA: The pilot must demonstrate the following:

- a) the use of the phraseology contained in the *Procedures for Air Navigation Services _ Air Traffic Management (PANS-ATM, Doc 4444)*; and
- b) where information can be obtained regarding the need for making written reports to various States when an RA is issued. Various States have different reporting requirements and the material available to the pilot should be tailored to the airline's operating environment.

2.3 Desirable items

2.3.1 Advisory thresholds

OBJECTIVE: Demonstrate knowledge of the criteria for issuing TAs and RAs.

CRITERIA: The pilot must be able to demonstrate an understanding of the methodology used by ACAS to issue TAs and RAs and the general criteria for the issuance of these advisories to include:

- a) the TA altitude threshold is 259 m (850 ft) below FL 420 and 366 m (1 200 ft) above FL 420;
- b) when the vertical separation at CPA is projected to be less than the ACAS-desired separation, an RA requiring a change to the existing vertical speed will be issued. The ACAS-desired separation varies from 91 m (300 ft) at low altitude to a maximum of 213 m (700 ft) above FL 300;

c) when the vertical separation at CPA is projected to be greater than the ACAS-desired separation, an RA that does not require a change to the existing vertical speed will be issued. This separation varies from 183 to 244 m (600 to 800 ft); and

d) RA fixed-range thresholds vary between 0.4 km (0.2 NM) at low altitude and 2 km (1.1 NM) at high altitude. These fixed-range thresholds are used to issue RAs in encounters with slow closure rates.

3. ACAS MANOEUVRE TRAINING

3.1 When training pilots to properly respond to ACAS-displayed information, TAs and RAs are most effective when accomplished in a flight simulator equipped with an ACAS display and controls similar in appearance and operation to those in the aircraft. If a simulator is utilized, CRM aspects of responding to TAs and RAs should be practised during this training.

3.2 If an operator does not have access to an ACAS-equipped simulator, the initial ACAS evaluation should be conducted by means of an interactive CBT with an ACAS display and controls similar in appearance and operation to those in the aircraft the pilot will fly. This interactive CBT should depict scenarios in which real-time responses must be made. The pilot should be informed whether or not the responses made were correct. If the response was incorrect or inappropriate, the CBT should show what the correct response should be.

3.3 The scenarios in the manoeuvre training should include initial RAs that require a change in vertical speed; initial RAs not requiring a change in vertical speed; maintain rate RAs; altitude crossing RAs; increase rate RAs; RA reversals; weakening RAs; RAs issued while the aircraft is at a maximum altitude, and multi-aircraft encounters. In all scenarios, excursions should be limited to the extent required by the RA. The scenarios should be concluded with a return to the original flight profile. The scenarios should also include demonstrations of the consequences of not responding to RAs, slow or late responses, and manoeuvring opposite to the direction called for by the displayed RA as follows:

3.3.1 TA responses

OBJECTIVE: To verify that the pilot properly interprets and responds to TAs.

CRITERIA: The pilot must demonstrate:

a) proper division of responsibilities between the pilot flying and the pilot not flying. The pilot flying should continue to fly the aeroplane and be prepared to respond to any RA that might follow. The pilot not flying should provide updates on the traffic location shown on the ACAS traffic display and use this information to help visually acquire the intruder;

b) proper interpretation of the displayed information. Visually search for the traffic causing the TA at a location shown on the traffic display. Use should be made of all information shown on the display, note being taken of the bearing and range of

the intruder (amber circle), whether it is above or below (data tag), and its vertical speed direction (trend arrow);

c) other available information is used to assist in visual acquisition. This includes ATC _party-line_ information, traffic flow in use, etc.;

d) because of the limitations described in 2.2.1.3 e), that no manoeuvres are made based solely on the information shown on the ACAS display; and

e) when visual acquisition is attained, right of way rules are used to maintain or attain safe separation. No unnecessary manoeuvres are initiated. The limitations of making manoeuvres based solely on visual acquisition are understood.

3.3.2 RA responses

OBJECTIVE: To verify THAT the pilot properly interprets and responds to RAs.

CRITERIA: The pilot MUST demonstrate:

a) proper division of responsibilities between the pilot flying and the pilot not flying. The pilot flying should respond to the RA with positive control inputs, when required, while the pilot not flying is providing updates on the traffic location, checking the traffic display and monitoring the response to the RA. Proper CRM should be used. If the operator's procedures require the pilot-in-command to fly all RAs, transfer of aircraft control should be demonstrated;

b) proper interpretation of the displayed information. The pilot recognizes the intruder causing the RA to be issued (red square on display). The pilot responds appropriately;

c) RAs requiring a change in vertical speed, initiation of a response in the proper direction is made within five seconds of the RA being displayed. After initiating the manoeuvre, and as soon as possible, as permitted by flight workload, ATC is notified using the standard phraseology;

Note._ Part III, Chapter 3, 3.2 c) 1), states that in the event of an RA, pilots should respond immediately and manoeuvre as indicated, unless doing so would jeopardize the safety of the aeroplane.

d) recognition of and the proper response to modifications to the initially displayed RA:

1) for increase rate RAs, the vertical speed is increased within 2 1/2 seconds of the RA being displayed;

2) for RA reversals, the manoeuvre is initiated within 2 1/2 seconds of the RA being displayed;

3) for RA weakenings, the vertical speed is modified to initiate a return towards level flight within 2 1/2 seconds of the RA being displayed; and

- 4) for RAs that strengthen, the manoeuvre to comply with the revised RA is initiated within 2 1/2 seconds of the RA being displayed;
- e) recognition of altitude crossing encounters and the proper response to these RAs;
- f) for RAs that do not require a change in vertical speed, the vertical speed needle or pitch angle remains outside the red area on the RA display;
- g) for maintain rate RAs, the vertical speed is not reduced. Pilots should recognize that a maintain rate RA may result in crossing through the intruder's altitude;
- h) that if a justified decision is made to not follow an RA, the resulting vertical rate is not in a direction opposite to the sense of the displayed RA;
- i) that the deviation from the current clearance is minimized by levelling the aircraft when the RA weakens and when _Clear of Conflict_ is annunciated, executing a prompt return to the current clearance; and notifying ATC as soon as possible, as permitted by flight crew workload;
- j) that when possible, an ATC clearance is complied with while responding to an RA. For example, if the aircraft can level at the assigned altitude while responding to a reduce climb or reduce descent RA, it should be done;
- k) that when simultaneous conflicting instructions to manoeuvre are received from ATC and an RA, the RA is followed and, as soon as possible, as permitted by flight crew workload, ATC is notified using the standard phraseology;
- l) a knowledge of the ACAS multi-aircraft logic and its limitations, and that ACAS can optimize separation from two aircraft by climbing or descending towards one of them. For example, ACAS considers as intruders only aircraft that it finds to be a threat when selecting an RA. As such, it is possible for ACAS to issue an RA against one intruder, which results in a manoeuvre towards another intruder that is not classified as a threat. If the second intruder becomes a threat, the RA will be modified to provide separation from that intruder;
- m) a knowledge of the consequences of not responding to an RA and manoeuvring in the direction opposite to the RA; and
- n) that a prompt response is made when a climb RA is issued while the aircraft is at the maximum altitude.

ATTACHMENT II

1. ACAS PERFORMANCE DURING HVR ENCOUNTERS

1.1 As of 2006, data collected by ACAS monitoring programs continue to show that a large percentage of ACAS RAs are a result of climbing or descending aircraft maintaining a high vertical speed while approaching their ATC-assigned altitude. Changes have been made to the ACAS SARPs and guidance material (see Annex 10) that have been effective in reducing the frequency of occurrence for these types of RAs, but these types of RAs continue to occur with a high degree of regularity in airspace throughout the world. It has been determined that no further changes are feasible within ACAS to address this issue without resulting in an unacceptable degradation of the safety provided by ACAS.

1.2 Modern aircraft and their flight guidance systems (autopilots, flight management systems, and autothrottles) are designed to fly specific flight profiles that provide fuel and time efficient flight paths. An integral concept of the design of the flight guidance systems includes allowing an aircraft to quickly climb to higher, more efficient operating altitudes and to remain at these altitudes as long as possible, which results in descents also being made with high vertical speeds. For economic benefits, the high vertical speeds used in a climb or descent are retained as long as feasible before initiating a smooth capture of the aircraft's assigned altitude.

1.3 The design of the flight guidance systems can result in vertical speeds in excess of 15 m/s (3 000 ft/min) until they are within 150 m (500 ft) of the aircraft's assigned altitude. When a climbing or descending aircraft maintains a vertical speed in excess of 15 m/s (3 000 ft/min) until it is within 150 m (500 ft) of the aircraft's assigned altitude, it is less than 30 seconds away from being at the adjacent IFR altitude, which may be occupied by an ACAS-equipped aircraft flying level at that altitude. If the intruder aircraft is horizontally within the protected area provided by ACAS, there is a high probability that an RA against the climbing or descending aircraft will be issued just as the intruder aircraft begins to reduce its vertical speed to capture its assigned altitude.

1.4 Figure 1 provides a representation of the encounter geometry of this scenario. ACAS typically issues a Climb RA, which calls for a climb at 8 m/sec (1 500 ft/min). Depending on the altitude of the level aircraft, this RA will typically be issued when the intruder aircraft is approximately 500 feet below its assigned altitude and the vertical speed of the intruder is in excess of 3 000 ft/min.

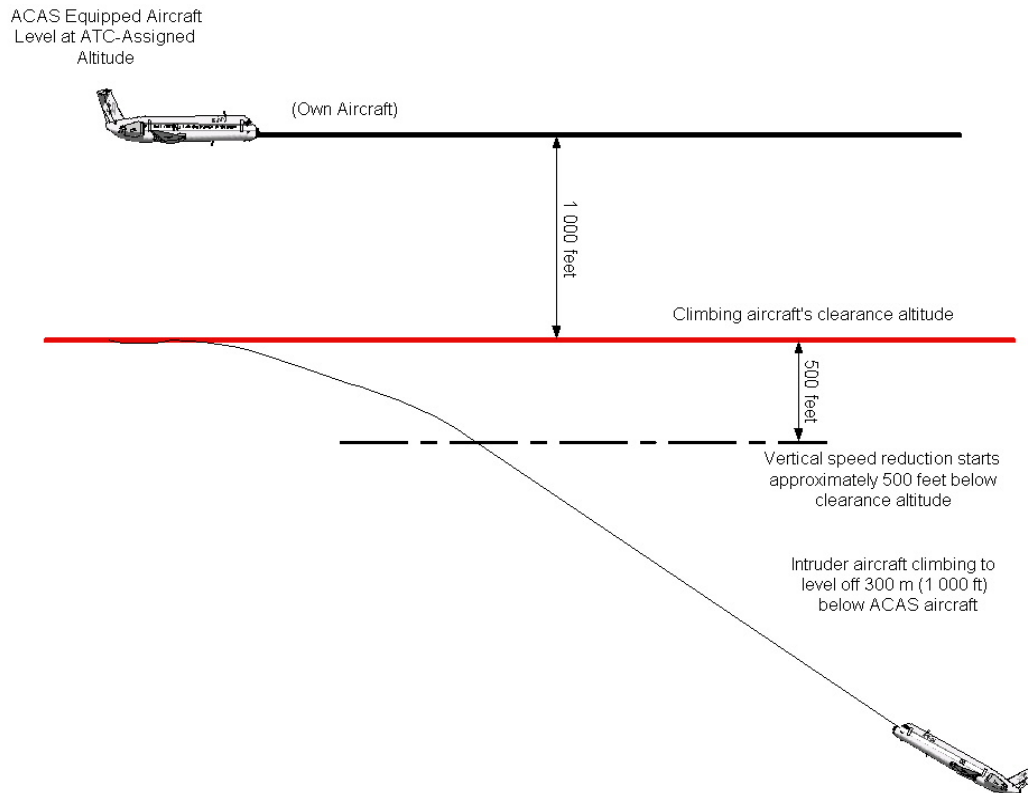


Figure III-3-3-1. Representative HVR Encounter Geometry

1.5 ACAS in the level aircraft is tracking a climbing/descending (intruder) aircraft and is using replies to its interrogations to determine the intruder's altitude and its vertical speed. The ACAS track is updated once per second. The intruding aircraft's track information, along with the track of the level ACAS aircraft (own aircraft), is used within ACAS to determine if the intruder aircraft is currently a threat or will be in the near future.

1.6 In determining whether the intruder aircraft will be a threat in the future, ACAS projects the existing vertical speed of the intruder and own aircraft, to estimate the vertical separation that will exist at the closest point of horizontal approach during the encounter. These projections use the current vertical speed of both aircraft, and ACAS is not aware of the intruder aircraft's intent to level at an adjacent altitude above or below its own aircraft's current altitude. Should this projection be less than the ACAS desired vertical separation, an RA will be issued.

1.7 Should the intruder aircraft continue to climb/descend with the high vertical speed until it is 15 to 25 seconds from being at the same altitude as the level ACAS aircraft (again depending on the ACAS aircraft's altitude), ACAS will issue an RA calling for the own aircraft to manoeuvre to increase vertical separation from the intruder aircraft.

2. OPERATIONAL IMPACTS OF RA's RESULTING FROM HVR ENCOUNTERS

2.1 Shortly after ACAS issues the RA (Climb RA for the encounter geometry shown in Figure III-3-3-1), the intruder aircraft begins reducing its vertical rate to capture its assigned altitude.

2.2 While the intruder aircraft is initiating its level off, the ACAS aircraft has started responding to its RA and may have left its assigned altitude. Both pilots and controllers agree that RAs issued in this encounter geometry are unwelcome. The RAs can be disruptive to a controller's current traffic flow and plans, and thus represent an increase in their workload. The response to the RA can also result in a loss of standard ATC separation if another aircraft is above the ACAS aircraft.

2.3 Pilots have reported that these types of RAs decrease their confidence in the performance of ACAS. These RAs typically occur repeatedly in the same geographic area and repeated RAs of this type result in pilots being reluctant to follow the RA. This can be potentially hazardous in the event that the intruder aircraft passes through its assigned altitude.

3. FREQUENCY OF OCCURRENCE

3.1 ACAS monitoring shows that the frequency of occurrence is dependent on how airspace is structured and managed. Data collected indicates that up to 70% of the RAs issued are caused by the intruder aircraft maintaining a high vertical speed while approaching its assigned altitude. Depending on the airspace structure and the flow of traffic, it is possible to have several of these RAs issued within one hour, although airspace containing a lower density of traffic will have relatively few RAs of this type. Some air traffic service providers have been able to change their traffic flows and/or operational procedures to reduce the occurrence of these types of RAs, but these types of RAs continue to occur with a high degree of regularity in airspace throughout the world.

3.2 HVR RAs have been observed in both terminal and en route airspace, although because of the previously higher vertical separation above FL 290 in non-RVSM airspace, very few RAs of this type have been observed above FL 290 in the past. With the current reduced separation, it is possible that HVR RAs may occur more frequently above FL 290 in RVSM airspace. Many HVR RAs occur in close proximity to large airports where departures are kept below arriving aircraft until some distance from the airport before being allowed to climb to higher altitudes and a large percentage of these RAs occur in geographic areas where there is a concentration of climbing and descending aircraft.

4. ACAS FEATURES THAT REDUCE THE LIKELIHOOD OF RAs BEING ISSUED IN THESE SITUATIONS

4.1 ACAS recognizes HVR encounters, such as that shown in Figure III-3-3-1. When this encounter geometry is detected, the issuance of RAs can be delayed by up to ten seconds. This delay allows additional time for the intruder aircraft to initiate a level off and for ACAS to then detect this level off. However, when the intruder aircraft maintains a vertical speed in excess of 15 m/s (3 000 ft/min) until it is within 150 m (500 ft) of its assigned altitude, even this 10 second delay may be insufficient for ACAS to detect the level off, and an RA may be issued. Safety studies have shown that further delays in issuing the RA result in unacceptable degradation in the safety provided by ACAS.

4.2 Consideration has also been given to providing ACAS with information regarding the intruder aircraft's intent. This is not considered to be a viable approach to reducing these types of RAs while retaining the existing level of safety provided by ACAS. Currently, it has not been possible to identify any additional changes to ACAS that will provide a further reduction in the frequency of these potentially disruptive RAs.

5. OPERATOR-SPECIFIED PROCEDURES

5.1 Because of the operational impacts to pilots and controllers caused by these types of RAs, the continued existence of these RAs, and the constraints on further modifications to ACAS, operators should specify procedures by which an aeroplane climbing or descending to an assigned altitude or flight level with an autopilot engaged may do so at a rate less than 8 m/sec (1 500 ft/min) within 300 m (1 000 ft) of the assigned level. Such procedural changes should provide an immediate operational benefit to both pilots and controllers by reducing the occurrence of HVR RAs.

5.2 The implementation of such procedures will not completely eliminate these RAs, but in the absence of other solutions such as the redesign of airspace, their implementation will reduce the frequency of these undesirable RAs until a technical solution can be developed. Options that operators should consider include flying the entire climb or descent at a pre-selected rate, modifying the climb or descent in the latter stage, and employing use of less than economic climb thrust in lower airspace.

5.3 A recommended procedure would call for a climbing or descending aircraft to adjust its vertical rate when approaching an assigned altitude, *and* when the pilot is aware that there is an aircraft level at an adjacent altitude. The crew can be made aware of the presence of the level aircraft by several means, including information provided by a controller, an ACAS TA, or by visual acquisition. When a crew of an intruder aircraft becomes aware that another aircraft is at an adjacent altitude, it is recommended that the vertical speed of the intruder aircraft be reduced to less than 8 m/s (1 500 ft/min) when approaching an altitude that is 300 m (1 000 ft) above or below the assigned altitude.

Note.— There is no intent in this recommendation to require a modification in vertical speed for every level off. This is not necessary and would introduce a significant increase in pilot workload.

5.4 Some autopilots may not properly capture the altitude if a mode change or vertical speed change is made after the altitude capture has started. Altitude deviations represent a significant percentage of pilot deviations and the performance of the autopilot during any altitude capture should be closely monitored in accordance with existing procedures.

5.5 Additional tasks may be required during some level off manoeuvres. However, the procedure is a recommendation, not a requirement. Further, the procedure does not suggest that adjustments to the aircraft's vertical speed be made unless the pilot is aware that traffic is at an adjacent altitude.

5.6 The operator should specify procedures that the pilot may use to reduce vertical speed when an autopilot is engaged, as appropriate for the type of aircraft. Also, the operator should consider authorizing pilots to use a modest vertical speed throughout a climb or descent when the vertical interval is not large – such as a change of altitude in a holding pattern - specifying how this should be accomplished.